



PLUG-IN COMMUNICATIONS MODULE PROFIBUS DP V1

Model		
product brand name		SETRON
Product designation		expansion module PAC Profibus DP
Type of voltage supply		from PAC 3200 / 4200
General technical data		
MTBF	y	141.1
Reference code / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P
Protection class		
Protection class IP		IP20
Combustibility class acc. to UL 94		V 0
Communication		
Protocol		Profibus DP V1/V2
<ul style="list-style-type: none"> is supported 		
Transfer rate		
<ul style="list-style-type: none"> minimum 	kbit/s	9.6
<ul style="list-style-type: none"> maximum 	kbit/s	12 000
Connections		
<ul style="list-style-type: none"> Design of the electrical connection 		9-pole Sub-D plug according to IEC 61158
Mechanical Design		
Height	mm	63
Width	mm	43
Depth	mm	22

Mounting type	plug-in module for the module slot of the PAC3200 / 4200
----------------------	--

Environmental conditions

Ambient temperature / during operation		
• minimum	°C	-5
• maximum	°C	55

Certificates

Reference code		P
• acc. to DIN EN 61346-2		

General Product Approval	EMC	Declaration of Conformity	other
---------------------------------	------------	----------------------------------	--------------



[Confirmation](#)

Further information

Information- and Downloadcenter (Catalogs, Brochures,...)

<http://www.siemens.com/lowvoltage/catalogs>

Industry Mall (Online ordering system)

<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM93000AB000AA0>

Service&Support (Manuals, Certificates, Characteristics, FAQs,...)

<http://support.automation.siemens.com/WW/view/en/7KM93000AB000AA0/all>

Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)



http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM93000AB000AA0

CAX-Online-Generator

<http://www.siemens.com/cax>

Tender specifications

<http://ausschreibungstexte.siemens.com/tiplv>

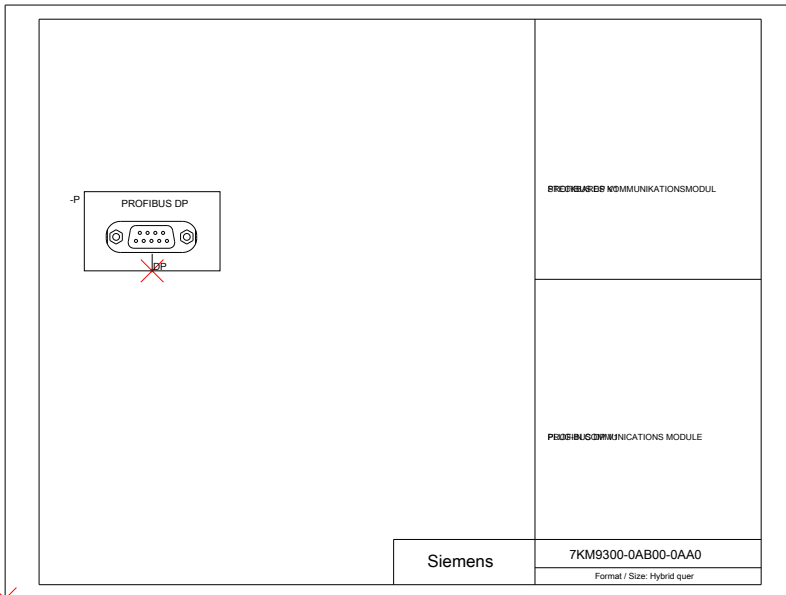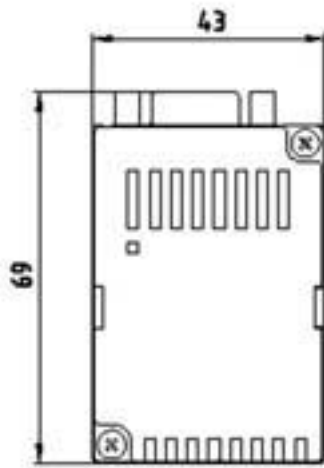

last modified:

21.10.2014