



Model		
product brand name		SETRON
Product designation		expansion module PAC RS485
Type of voltage supply		from PAC 3200 / 4200

General technical data		
MTBF	y	222.3
Reference code / acc. to DIN 40719 extended according to IEC 204-2 / acc. to IEC 750		P

Protection class		
Protection class IP		IP20
Combustibility class acc. to UL 94		V 0

Communication		
Protocol		SEABus / MODBUS (switchable)
<ul style="list-style-type: none"> is supported 		
Transfer rate		
<ul style="list-style-type: none"> minimum 	kbit/s	4.8
<ul style="list-style-type: none"> maximum 	kbit/s	38.4

Connections		
<ul style="list-style-type: none"> Design of the electrical connection 		screw-type terminals

Mechanical Design		
Height	mm	63
Width	mm	43
Depth	mm	22

Mounting type	plug-in module for the module slot of the PAC3200 / 4200
----------------------	--

Environmental conditions

Ambient temperature / during operation		
• minimum	°C	-5
• maximum	°C	55

Certificates

Reference code		P
• acc. to DIN EN 61346-2		



General Product Approval	EMC	Declaration of Conformity	other
---------------------------------	------------	----------------------------------	--------------



[Confirmation](#)

Further information

- Information- and Downloadcenter (Catalogs, Brochures,...)**
<http://www.siemens.com/lowvoltage/catalogs>
- Industry Mall (Online ordering system)**
<https://eb.automation.siemens.com/mall/en/WW/Catalog/Product/7KM93000AM000AA0>
- Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**
<http://support.automation.siemens.com/WW/view/en/7KM93000AM000AA0/all>
- Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, ...)**
http://www.automation.siemens.com/bilddb/cax_en.aspx?mlfb=7KM93000AM000AA0
- CAX-Online-Generator**
<http://www.siemens.com/cax>
- Tender specifications**
<http://ausschreibungstexte.siemens.com/tiplv>

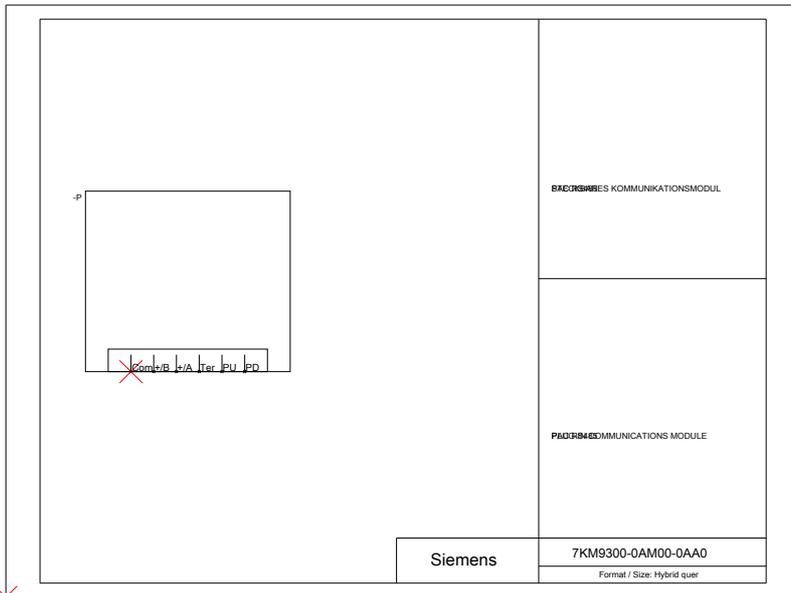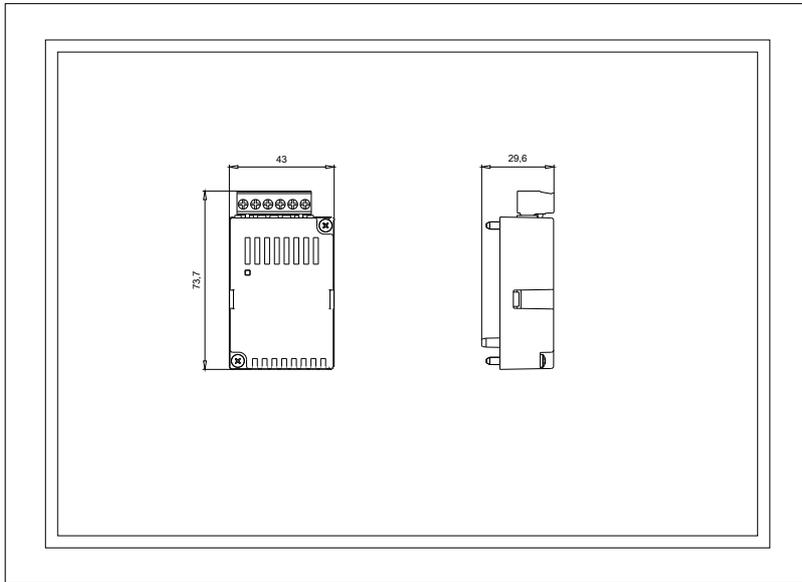

last modified:

21.10.2014